


Technique for cable laying and overhead line construction

- Energy cable laying up to 680 kV
- Fibre optic, mini and micro cables
- Cable winding and length measuring
- Overhead line construction up to 110 kV
- Seminars and product instructions



Cable bollard winch without brake

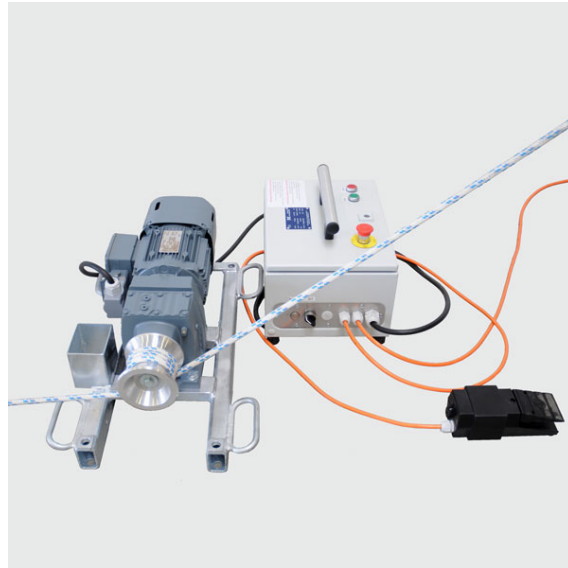

Cable tray capstan winches, electric motors, mounted on base frame enabling alternative fixing, incl. footswitch. Frequency converter allows two pulling speeds, one for heavy cable pulls up to 1 t and one for lighter cable pulls up to 400 kp. Not allowed for vertical pulls.

- Electric motor 1,5 kW, with 2 speeds, each variable through frequency convertor 20-100 Hz.
- Connectable on 230 volt net, or with adapter cable also on 400 volt net.
- Without lifting brake, therefore not allowed for vertical cable laying.

Code	Type	Pull1 (50Hz)	Pull2 (80Hz)	Connection	kg
279560	PSW 10-13	10 kN/7 m/min.	4 kN/13 m/min.	230V/50-60Hz	67,00
279580	ADK 400	Adapter cable	400 to 230 volt	400-230V/50Hz	0,50