




# INSULATING BAG for connector MP-29/2S - MP-29/3S

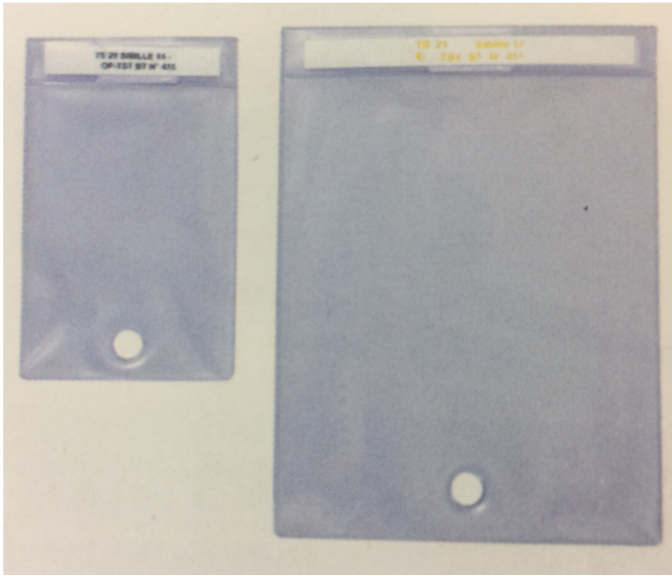

Insulating bags are used to cover live parts. They avoid unintentional contact with live parts.

For distance and contact method work on overhead networks and indoor installations. Maximum use voltage 1000 V.

In accordance with ERDF Serect TST BT N°455 specification.

## CHARACTERISTICS

---

- Insulating envelope, translucent made of PVC material.
- Elastic closing fitted with « Velcro » type strip.
- Hole at the base of the bag envelope for gripping with hook pole in case of distance method work.

## STANDARD REFERENCE

---

ERDF SERECT TST BT N°455 specification.

## COMPOSITION / CHARACTERISTICS

---

| Reference | Width (mm) | Height (mm) | Weight (kg) |
|-----------|------------|-------------|-------------|
| MP-29/2S  | 136        | 215         | 0,1         |
| MP-29/3S  | 225        | 305         | 0,16        |

